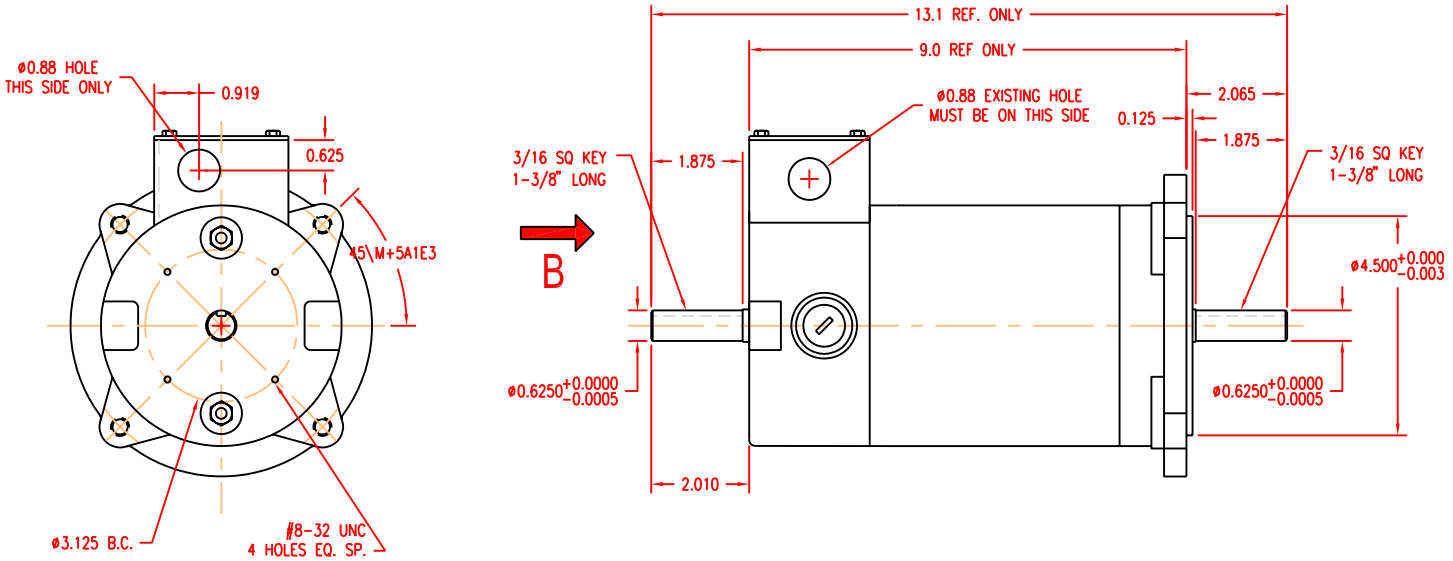

NOTES:

1. PM DC MOTOR, 1/2HP, 90V, 1750RPM, TENV;
2. DOUBLE EXTEND SHAFT
3. LEADWIRES TO BE 6" MIN, AND TERMINATED WITH 0.25 INSULATED FASTON TAB (AMP# 2-521055-2 OR EQUIV).

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN INCHES
INTERPRET DIM AND TOL PER ASME Y14.5M - 1994
TOLERANCES:
DECIMALS: .XX ±.010, .XXX ±.005, .XXXX ±.0005
FRACTIONAL: ± 1/32
ANGULAR: ± 30'
BREAK ALL EDGES
ALL HOLES CHAMFERED .01"45°
SURFACE ROUGHNESS: 125 µin BEFORE PLATING
THIRD ANGLE PROJECTION

THIS DRAWING AND THE INFORMATION ON IT ARE THE PROPERTY OF HALLMARK INDUSTRIES, INC. AND IS NOT TO BE USED OR DUPLICATED WITHOUT PRIOR AUTHORIZATION

HALLMARK INDUSTRIES, INC.
715 BRIDGEDALE DRIVE, SCHAUMBURG, IL 60194 PHONE: (847)882-8821 FAX: (847)882-5858

TITLE: PM DC MOTOR, 1/2HP, 90V/1750RPM
56C, TENV, DOUBLE EXTEND SHAFT

DRAWN	DRAWN DATE	CHECKED	CHECK DATE
	05/2001T		

SIZE	DWG NO.	REV
B	MD0282X	A

SCALE	ALT. NO.	SHEET
1:1	TENV_DIM	1/1